

RG-ES110D-P

8-Port 10/100 Mbps with 2-Port Gigabit Desktop Unmanaged PoE Switch



Highlights

- 8-Port 10/100Mbps with 2-Port Gigabit unmanaged PoE switch
- Unmanaged switch, which is visible on Ruijie Cloud APP
- Large buffer for smooth data transmission
- Intelligent PoE management
- High-quality design
- Adaptation to various scenarios

Highlight Features

Unmanaged Switch, Which Is Visible on Ruijie Cloud*

* If an unmanaged switch needs to be visualized on Ruijie Cloud, at least one managed switch needs to be deployed on the same network



Intelligent and Secure CCTV Network



Watchdog



Extend Mode



Port Isolation



PoE Auto Recovery



250 Meters Transmission



Flexible Extend mode



Higher Security

Highlight Features

Intelligent PoE Management

Fit for various powered devices up to 30W



High-quality Makes Network Reliable


Stable without frequent reboot




Highlight Features

Better Quality Design

Strict standards in PCB design and component selection

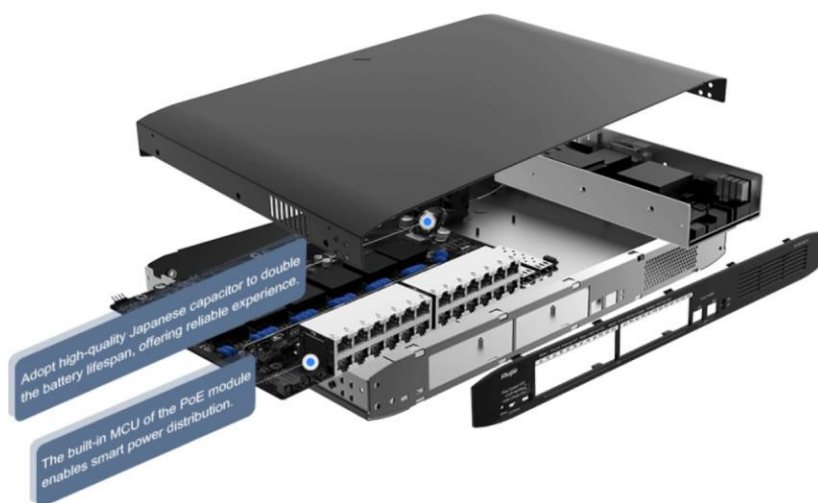

Designed for Various Scenarios

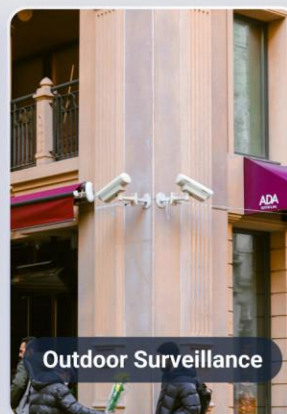

/ Product Information

Model	RG-ES110D-P
Product Category	Layer 2

/ Hardware Specifications

Model	RG-ES110D-P
Product Information	
Warranty	3 years
Port Specifications	
Total number of RJ45 ports	10
Number of 10/100BASE-T ports	8
Number of 10/100/1000BASE-T ports	2
DIP switch	Switchover in three modes: 1. Flow Control On 2. Flow Control Off 3. Port Isolation
Power Supply and Consumption	
PoE Out standard	PoE/PoE+ (IEEE 802.3af/at)
Number of PoE Out ports	8
Number of PoE/PoE+ Out ports	8
PoE budget	110 W
PoE power pins	1–2 (+), 3–6 (-)
Power input	Rated voltage range: 100-240V~ Maximum voltage range: 90-264V~ Frequency: 50/60Hz Rated current: 3.0A
Maximum power consumption	8 W (with no PoE load) 129 W (with PoE full load)
Power supply	DC power adapter
System Specifications	

Hardware Specifications

Model	RG-ES110D-P
Flash memory	1MB
Forwarding rate	4.17 Mpps
Switching capacity	5.6 Gbps(bit/s)
Dimensions and Weight	
Casing	Metal
Product dimensions (W x D x H)	190 mm x 100 mm x 28 mm (7.48 in. x 3.94 in. x 1.1 in.)
Weight	510 g (1.12 lbs) (without packaging materials)
Shipping weight	1.34 kg (2.95 lbs)
Environment and Reliability	
Fan	Fanless design
Cooling	Natural cooling
Acoustic noise	No
Mounting options	Wall/Desktop
Hot swapping of cables	Hot swapping supported by the service port and power connector
MTBF	200,000 hours
Operating temperature	0°C to 45°C (32°F to 113°F)
Storage temperature	−40°C to +70°C (−40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: −500 m to +5,000 m (−1,640.42 ft. to +16,404.20 ft.) Storage altitude: −500 m to +5,000 m (−1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 8 kV Contact discharge: 6 kV
Surge protection	Service port: ±4 kV for common mode Power connector: ±4 kV for common mode and ±2 kV for differential mode

Hardware Specifications

Model	RG-ES110D-P
Certification and Regulatory Compliance	
EMC	EN 55032 EN IEC 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	EN 62368-1 IEC 62368-1
Certification	CE

Software Specifications

Model	RG-ES110D-P
Security	
Port isolation	When port isolation is enabled, ports 1-8 are isolated from each other, but can communicate with ports 9 and 10

Package Contents

Model	RG-ES110D-P
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 Redefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>

čeština (cs)

EU PROHLÁŠENÍ O SHODĚ

1. Model č., ochranná známka:

RG-ES110D-P

Ruijie, Reyee

2. Jméno a adresa výrobce nebo jeho zplnomocněného zástupce:

ENIF PEGASUS S.R.L.

Str. RADOVANU, Nr. 7, Bloc 42, Scara 1, Etaj 5, Apartament 29, 22882 București Sectorul 2, Romania

3. Toto prohlášení o shodě se vydává na výhradní odpovědnost výrobce:

Ruijie Networks Co., Ltd.

Building 19, Juyuanzhou Industrial Park, No. 618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China

4. Předmět prohlášení:

Switch

5. Výše popsany předmět prohlášení je ve shodě s příslušnými harmonizovanými právními předpisy Unie a náležitých případech další harmonizované právní předpisy Unie:

EMC - 2014/30/EU, LVD - 2014/35/EU,

RoHS - (EU) 2015/863 amending Annex II to 2011/65/EU,

6. Odkazy na příslušné harmonizované normy, které byly použity, nebo na jiné technické specifikace, na jejichž základě se shoda prohlašuje. Odkazy se uvedou s jejich identifikačním číslem a verzí a v příslušných případech rovněž s datem vydání:

EN 55032:2015+A1:2020, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021

EN 55035:2017+A11:2020, EN 300 386 V2.1.1, EN 62368-1:2014+A11:2017, EN50581:2012

0

7. Případně: oznámený subjekt ... (název, číslo) ... provedl ... (popis opatření) ... a vydal certifikát EU přezkoušení typu:

8. V příslušných případech popis příslušenství a součástí, včetně softwaru, které umožňují zamýšlené fungování rádiového zařízení v souladu s EU prohlášením o shodě:

9. Další informace:

(podpis):

(jméno, funkce):

Podepsáno za a jménem:

(místo a datum vydání):

Tim Song

Tim Song, Product Compliance Lead

Ruijie Networks Co., Ltd.

Shenzhen, China, 2023-04-27