


RG-EST350 V2

5GHz Dual-stream 802.11ac

5KM Wireless Bridge

DATASHEET

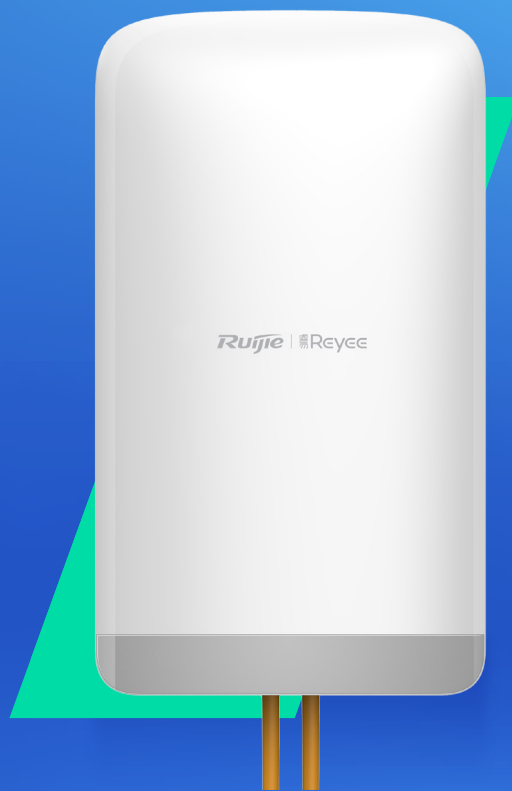


Highlights

- RG-EST350 V2 can easily transmit data from 5KM away in real time
- Automatic pairing at long distance, without complex alignment
- IP54 Weatherproof, -30°C~65°C guarantee stable operating at outdoor environment
- Support maximum 45 x 2MP cameras loading at 3KM, 20 x 2MP cameras loading at 5KM
- Visually Intuitive statistics monitoring on Ruijie cloud, easy maintenance at remotely

/ Highlight Features


RG-EST350v2

5GHz Dual-stream 802.11ac Next-generation Wireless Bridge

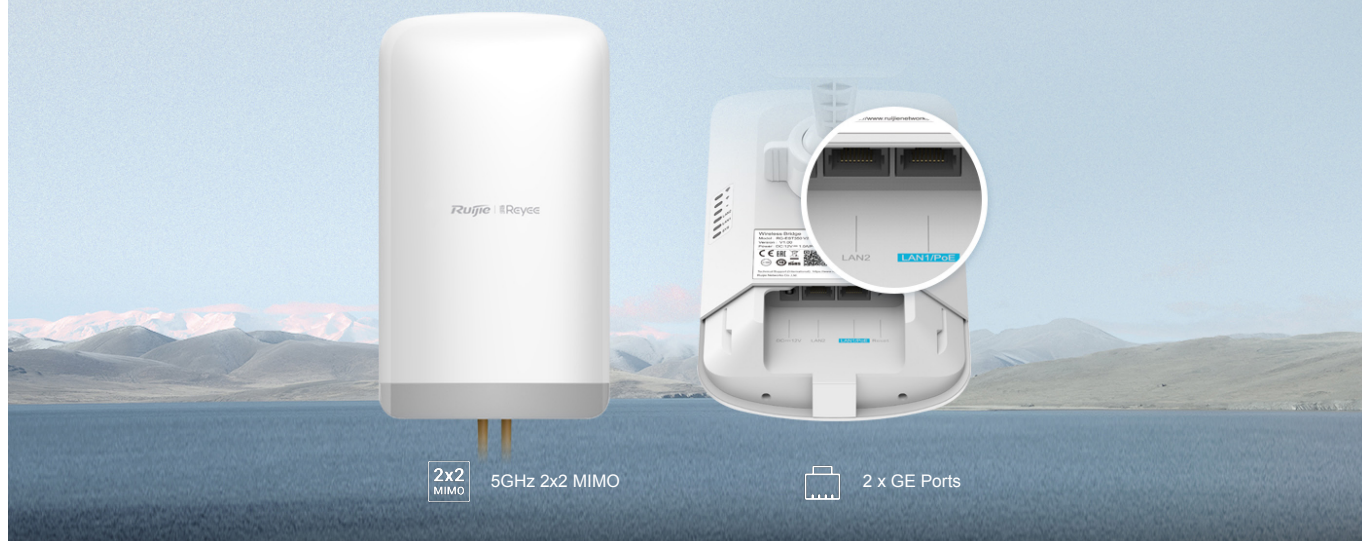

Long Range

High-speed wireless data transmission at 5KM range

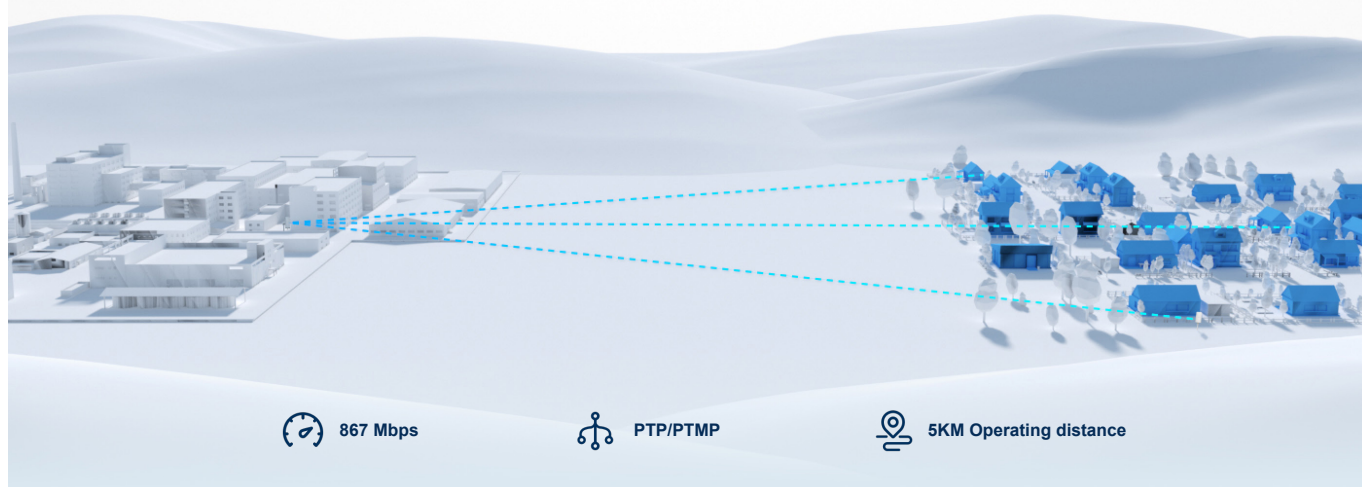

Highlight Features

High Capacity

45 cameras maximum at 3KM, 20 cameras maximum at 5KM*



3KM

2MP

x **45** Units



5KM

2MP

x **20** Units

*H.265, 2MP Cameras, 3Mbps. To guarantee the transmission quality, the environment should be kept as open as possible to reduce the interference. At the same time, it is recommended to adjust it to the best alignment angle with the signal strength indicator or Ruijie Cloud APP.

Reliable



V0 level
flame retardant



IP54
Weatherproof




-30~65°C operating
temperature

Highlight Features

Convenient


Zero configuration automatic pairing
Plug and Play

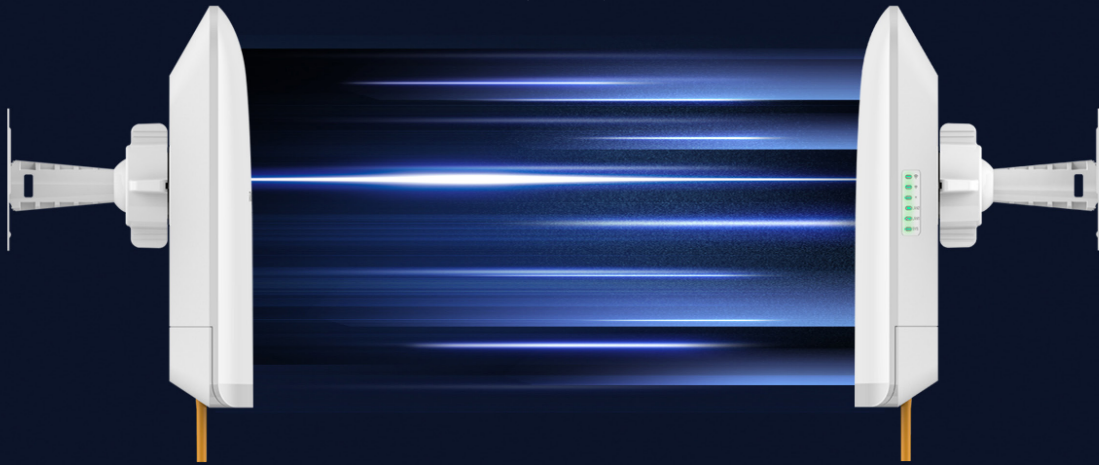

Easy to Install



Cloud, Make Your Business Easy

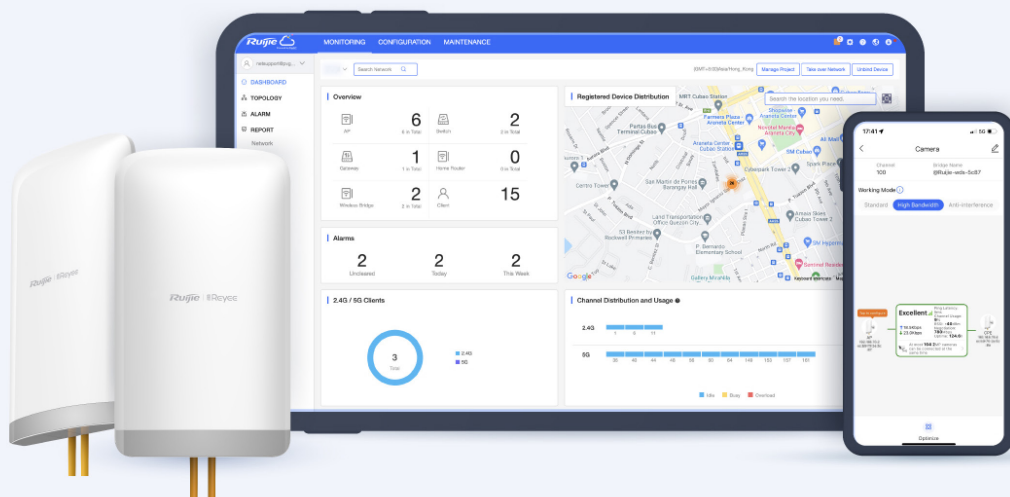

Specifications

Basic

Radio Design	5 GHz Single-Band Dual-Stream
Operating Band	802.11a/n/ac: 5.150~5.350GHz, 5.470~5.725GHz , 5.725~5.850GHz (country specific)
Antenna	Directional antennas, 15 dBi
Polarization	Horizontal: 31°, Vertical: 14°
Bridging Distance	5 KM (recommended)
Spatial Streams	2x2, MU-MIMO
Memory/Flash	128 MB/8 MB
Maximum Throughput	Up to 867 Mbps at 5 GHz
Ports	2 10/100/1000Base-T Ethernet ports, port 1 with Passive PoE
Max. Transmit Power	≤400 mW(26 dBm) (adjustable)
IP Rating	IP54
Lightning Protection	4 KV
Installation	Wall-mounted/ Pole-mounted
Weight	0.5 kg
Dimensions (D x W x H)	230 mm × 132 mm × 48 mm

Software Features

IPv4	
802.1Q VLAN	✓
Multi-VLAN Transparent Transmission	✓
ARP	256
Max. Concurrent Connections	8000
Ping	✓
Traceroute	✓

Specifications

Software Features

IPv4

Unicast traffic



DHCP Client



DNS Client



Static IP address



IP Collision Avoidance



Management IP

192.168.120.1

Routing

Default Route



Wireless

SSID/SSID Hiding



Password

Open / WPA-PSK / WPA2-PSK / WPA/WPA2-PSK

RSSI

-58 dBm@1KM
-66 dBm@3KM
-70 dBm@5KM

Performance

230 Mbps@1KM(HT40)
200 Mbps@3KM(HT40)
150 Mbps@5KM(HT40)

One-Click Optimization



DFS



Local Forwarding



WLAN QoS

WMM

Management

Zero Provisioning on Cloud

QR-Code / Serial Number

CWMP(TR069) Support



Point-to-Point



Specifications

Software Features

Management

Point-to-Multipoint

Recommended 3

Self-Organizing Network

Max. 200 wireless bridges

AP/CPE Switchover



Interface Configuration



Country Code

176 countries support, details refer to Country&Region Code reference

Clock setting



Time Zone



Maintenance

Alarm

IP address conflict / SSID / Offline

Diagnostics



Reboot



Reset



Cloud Features

Remote Access



Remote Reboot



Statistics Monitoring



Working mode

Normal / High performance / Anti-interference

Remote SSH



Remote EWeb



Camera Reference

3Mbps Video Bit Rate

50 Units/1KM

45 Units/3KM

20 Units/5KM

Specifications

Software Features

Camera Reference

4-5Mbps Video Bit Rate	30 Units/1KM 25 Units/3KM 12 Units/5KM
------------------------	--

6Mbps Video Bit Rate	20 Units/1KM 13 Units/3KM 8 Units/5KM
----------------------	---

Hardware Features

Physical Features

LED indicator	LEDs indicate the bridging quality: LED off: No bridging One LED blinking: <-75dBm One LED on: -75dBm< RSSI <-73dBm One LED on and one LED blinking: -73dBm< RSSI <-71dBm Two LEDs on: -71dBm< RSSI <-68dBm Two LEDs on and one LED blinking: -68dBm< RSSI <-64dBm Three LEDs on: >-64dBm
---------------	--

Hardware Button	1 reset button
-----------------	----------------


Power Supply	12 VDC power supply or 24 VDC Passive PoE
--------------	---

Power Consumption	< 9W
-------------------	------


Environment	Operating temperature: -30°C to 65°C (-22°F ~ 149°F) Storage temperature: -40°C to 85°C (-40°F ~ 185°F) Operating humidity: 5% to 95% (noncondensing) Storage humidity: 5% to 95% (noncondensing)
-------------	--

MTBF	> 250,000H
------	------------


Antenna Polarization

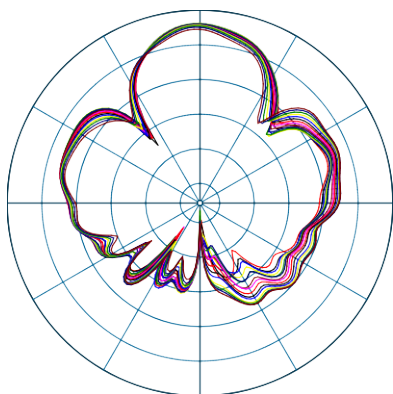


Vertical Azimuth

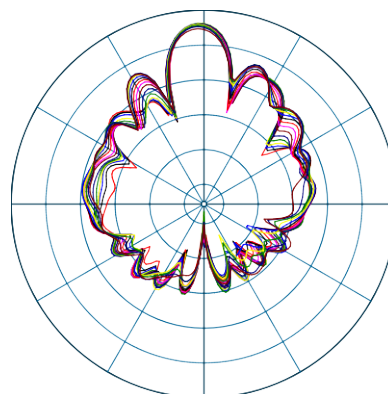

Vertical Elevation

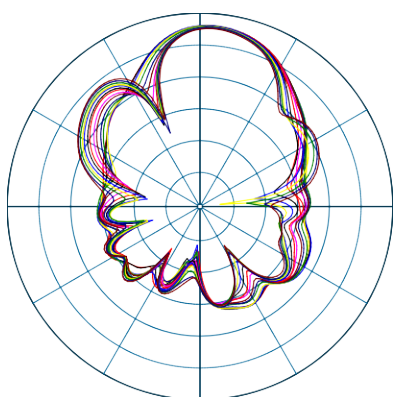

Horizontal Azimuth

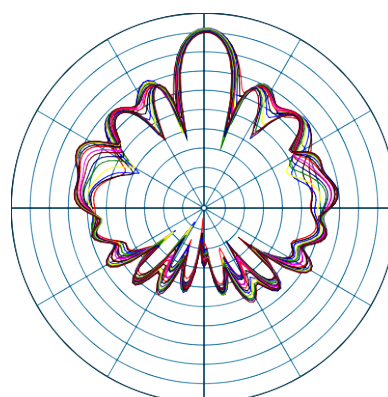

Horizontal Elevation

Package Contents

Device	RG-EST350 V2 * 2
Mounting Bracket	2
Hose Clamps	2
Universal Joint Assemblies	2
Power supply	Power adapter * 2
User Manual	1
Wall Anchors	6
Phillips Pan Head Screws	8
Package Weight	2.3 kg
Package Dimension (w x d x h)	490 mm * 363 mm * 80 mm

Ruijie | Rcycc

 **Redefine your easy network**

Copyright ©2000-2022 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd
Floor 11, East Wing, Zhongyipengao Plaza,
No.29 Fuxing Road, Haidian District, Beijing China
Website: <https://www.ruijienetworks.com>

čeština (cs)

EU PROHLÁŠENÍ O SHODĚ

1. Model č., ochranná známka:

RG-EST350 V2

Ruijie, Reyee

2. Jméno a adresa výrobce nebo jeho zplnomocněného zástupce:

ENIF PEGASUS S.R.L.

Str. RADOVANU, Nr. 7, Bloc 42, Scara 1, Etaj 5, Apartament 29, 22882 București Sectorul 2, Romania

3. Toto prohlášení o shodě se vydává na výhradní odpovědnost výrobce:

Ruijie Networks Co., Ltd.

Building 19, Juyuanzhou Industrial Park, No. 618 Jinshan Road, Cangshan District, Fuzhou, Fujian, China

4. Předmět prohlášení:

Wireless Bridge

5. Výše popsaný předmět prohlášení je ve shodě s příslušnými harmonizovanými právními předpisy Unie a
náležitých případech další harmonizované právní předpisy Unie:

EMC - 2014/30/EU, LVD - 2014/35/EU, RED - 2014/53/EU,

RoHS - (EU) 2015/863 amending Annex II to 2011/65/EU,

6. Odkazy na příslušné harmonizované normy, které byly použity, nebo na jiné technické specifikace, na jejichž
základě se shoda prohlašuje. Odkazy se uvedou s jejich identifikačním číslem a verzí a v příslušných případech
rovněž s datem vydání:

EN 62368-1:2014+A11:2017, EN 61000-3-3:2013+A1:2019+A2:2021, EN IEC 61000-3-2:2019+A1:2021

EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN 301 489-1 V2.2.3, EN 301 489-3 V2.1.1

EN 301 489-17 V3.2.4, EN 301 893 V2.1.1, EN IEC 62311:2020

7. Případně: oznámený subjekt ... (název, číslo) ... provedl ... (popis opatření) ... a vydal certifikát EU
přezkoušení typu:

8. V příslušných případech popis příslušenství a součástí, včetně softwaru, které umožňují zamýšlené fungování
rádiového zařízení v souladu s EU prohlášením o shodě:

0

9. Další informace:

(podpis):

(jméno, funkce):

Podepsáno za a jménem:

(místo a datum vydání):

Tim Song

Tim Song, Product Compliance Lead

Ruijie Networks Co., Ltd.

2024/5/23