

Přesměrování hovoru

1. Stiskněte na telefonu ikonu > Line > vyberte linku ~ 'nastavte přesměrování
2. Zadejte číslo a typ přesměrování a stiskněte OK ikonu .

Ztlumení hovoru

1. Stiskněte pro ztlumení mikrofonu během hovoru.
2. Stiskněte znovu pro zrušení ztlumení konverzace.

Seznam hovorů

1. Stiskněte ikonu Call Logs .
2. Procházejte seznam s použitím navigačních tlačítek nebo posunem a výběrem na obrazovce
3. Chcete-li vytočit položku, stiskněte ikonu Dial nebo klikněte na ikonu telefonu vlevo a klikněte na ikonu dial nebo zvedněte sluchátko nebo stiskněte nebo .

Telefonní seznam

Přístup k telefonnímu seznamu:

1. Stiskněte ikonu .
2. Vyberte All Contacts nebo nějakou skupinu.
3. Pro vytočení položky stiskněte ikonu .

Přidat nový záznam:

1. Stiskněte ikonu , stiskněte All Contacts nebo nějakou skupinu > stiskněte ikonu Add.
2. Zadejte jméno a číslo a stiskněte OK ikonu .

Programovací tlačítka

Programovací tlačítka:

1. Můžete použít webové rozhraní telefonu ke konfiguraci tlačítek na obrazovce.
2. Stiskněte unfold > můžete stisknout nějaké tlačítko, které je prázdné nebo dlouze stiskněte tlačítko které chcete konfigurovat, vyberte typ a hodnotu, stiskněte ikonu .

Ostatní tlačítka :

1. Můžete konfigurovat zkratky pro navigační tlačítka a soft tlačítka ve web rozhraní
2. Můžete stisknout Phone setting ikonu > Key, vyberte požadované soft tlačítko, pak vyberte konfigurovatelnou položku a zvolte váš vybraný typ a hodnotu, stiskněte Save.

Redial

Stiskněte , znovu vytočte poslední číslo.

Nerušit DND

1. Stiskněte ikonu DND když je telefon v klidovém stavu nevyberte Phone Settings ikonu > DND.
2. Vyberte režim.

Hlasová zpráva

1. Pro přístup do hlasové schránky stiskněte tlačítko Hlasová zpráva nebo ikonu Voice message , počet zpráv bude indikován, pokud je poskytuje váš server nebo ústředna.
2. Vyberte linku a ikonu telefonu pro hovor.


Bluetooth

1. Stiskněte ikonu Bluetooth na statusové liště pro otevření Bluetooth.
2. Stiskněte ikonu Settings > Connected devices > Pair new device Po otevření se zobrazí seznam naskenovaných Bluetooth, vyberte zařízení, a klikněte na něj pro spárování.

Wi-Fi

1. Vyberte ikonu Settings > Network & internet > Wi-Fi, zapněte Wi-Fi, a můžete procházet seznam dostupných Wi-Fi-Fi;
2. Vyberte dostupnou síť, klikněte na ni a zadejte heslo pro připojení, a klikněte na tlačítko Připojit.

Fanvil

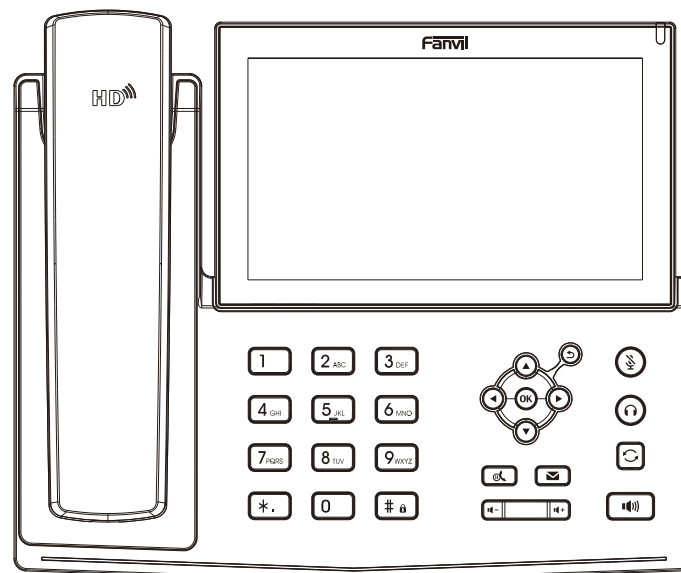

X7A

Krátký instalační návod


Fanvil Technology Co., Ltd

www.fanvil.com


Fanvil Technology Co., LTD.

www.fanvil.com

Packaging list

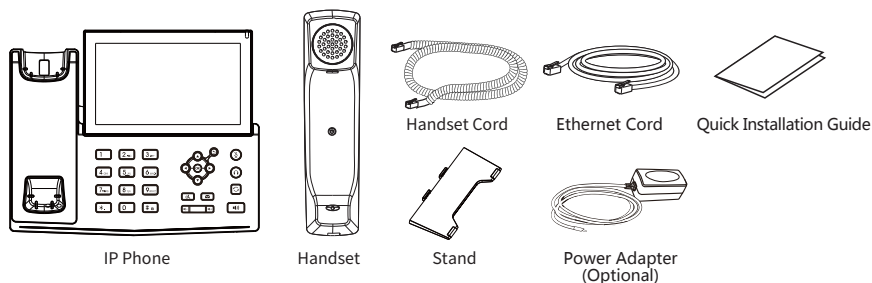

Screen icon

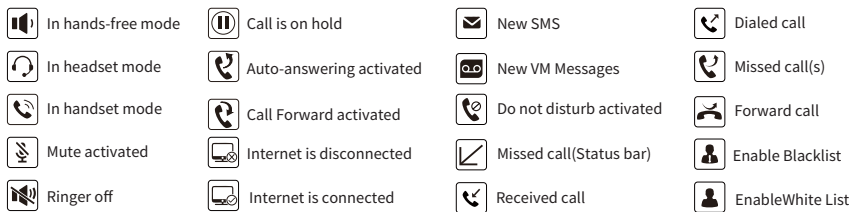

Keys features



Message waiting indicator



Up/down/left/right navigation keys,
Return key
OK key, Shortcut to Menu
Return key, Go back to the previous directory



Hold key, Hold/Resume the call



In idle mode: ringer off
In communication mode: mute/un-mute a call



In idle mode or during ringing:
increase or decrease ringer volume
In communication: increase or
decrease earpiece, headset or hands-free volume



Voice message key



Headset key,
Activate/deactivate Headset



Redial key, Access to redial the last record




Long press to lock keypad.
Enter PIN to unlock keypad (default 123)



Hands-free key, Activate/deactivate hands free

Installation the device


Bracket desktop installation

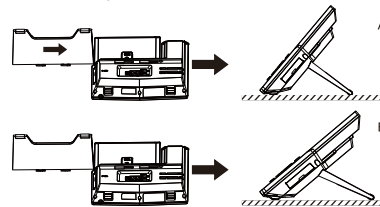

Connecting to the Device

Please connect power adapter, network, PC, handset, and headset to the corresponding ports as described in below picture.

- ① USB port: connect USB device (U disk)
- ② Power port: connect the power adapter.
- ③ Network port: connecting local area network or internet.
- ④ PC port: the network port connect to the computer.
- ⑤ Headset port: connect headset.
- ⑥ Headset port: connect IP Phone handset.

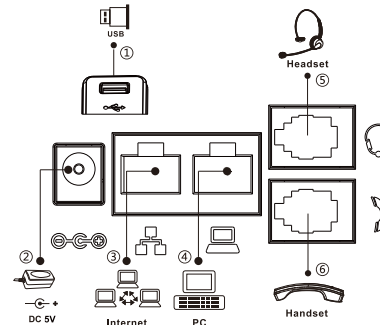

Configuration

Configuration via Phone

1. Press Phone Settings icon .
2. Select Ethernet Settings: To configure the Network Settings (DHCP/Static)
3. Select Line: To configure enable the account, fill the SIP server address, port, user name, password etc.

Configuration via Web

1. Get the IP address from the phone: Press Phone Settings icon > Common.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (The default username and password are both "admin").
3. Configure: Select network/Account, etc. And fill the relevant content.

Language setting

1. Press Settings icon > System > Language & Input > Languages.
2. Select the desired language.

Making a call

1. **Pre-dialing:** enter the phone number and pick up the handset.
2. **Direct dialing:** lift the handset and enter the phone number.
3. **Handsfree:** enter phone number and press or vice versa.
4. **Headset:** enter phone number and press or vice versa.
5. **Dial icon:** Click dial icon and then enter the phone number.
6. **Designated line:** press line key, enter phone number and press dial key.

Accepting a call

1. **With the handset:** pick up the handset.
2. **With a headset:** press .
3. **With the handsfree:** press .

Putting a call on hold

1. Press key or Hold icon, caller is put on hold.
 2. To retrieve the call press key or Resume icon.
- Note:** with more than one active call, select desired call by sliding screen and use the corresponding icon to hold or resume.

3-party conference

1. Once in line with 1st caller, press Conference icon, 1st caller is put on hold.
2. Then call the 2nd number.
3. After, 2nd call is established, press Conference icon to set up the conference.

Call transfer

Attended transfer:

1. Press Xfer icon during the active conversation, the call is put on hold.
2. Dial the second telephone number.
3. When the call is answered, then press Xfer icon to complete the operation.

Blind transfer:

1. Press Xfer icon during the active conversation, the call will be on hold.
2. Then enter the 2nd telephone number and press Xfer icon.